Cautions, warnings, and regulatory information

READ AND SAVE THESE INSTRUCTIONS Follow the instructions in this installation manual. These instructions must be followed to avoid damage to this product and associated equipment. Product operation and reliability depend upon proper installation.



DO NOT INSTALL ANY SIMPLEX™ PRODUCT THAT APPEARS DAMAGED Upon unpacking your Simplex product, inspect the contents of the carton for shipping damage. If damage is apparent, immediately file a claim with the carrier and notify an authorized Simplex product supplier.



ELECTRICAL HAZARD Disconnect electrical field power when making any internal adjustments or repairs. All repairs should be performed by a representative or an authorized agent of your local Simplex product supplier.



STATIC HAZARD Static electricity can damage components. Handle as follows:

- Ground yourself before opening or installing components.
- Prior to installation, keep components wrapped in anti-static material at all times.

4090-9801 Semi-Flush Cover and 4090-9802 Surface Cover Installation

IDNet™ modules that mount into a 4-inch back box have Simplex™ semi-flush and surface cover options that allow viewing of the module LED. Install the Simplex™ 4090-9801 Semi-Flush or 4090-9802 Surface Cover(s) using Figure 1 as a reference. Mount the cover and module as follows:

1. Loosen the two 8/32 panhead screws on the 4-inch square back box.
2. Mount the module to the back box using the teardrop holes on the modules mounting bracket. Secure module to back box with the two 8/32 panhead screws.
3. Install the semi-flush or surface cover to the module bracket using four #6/32 flathead screws.

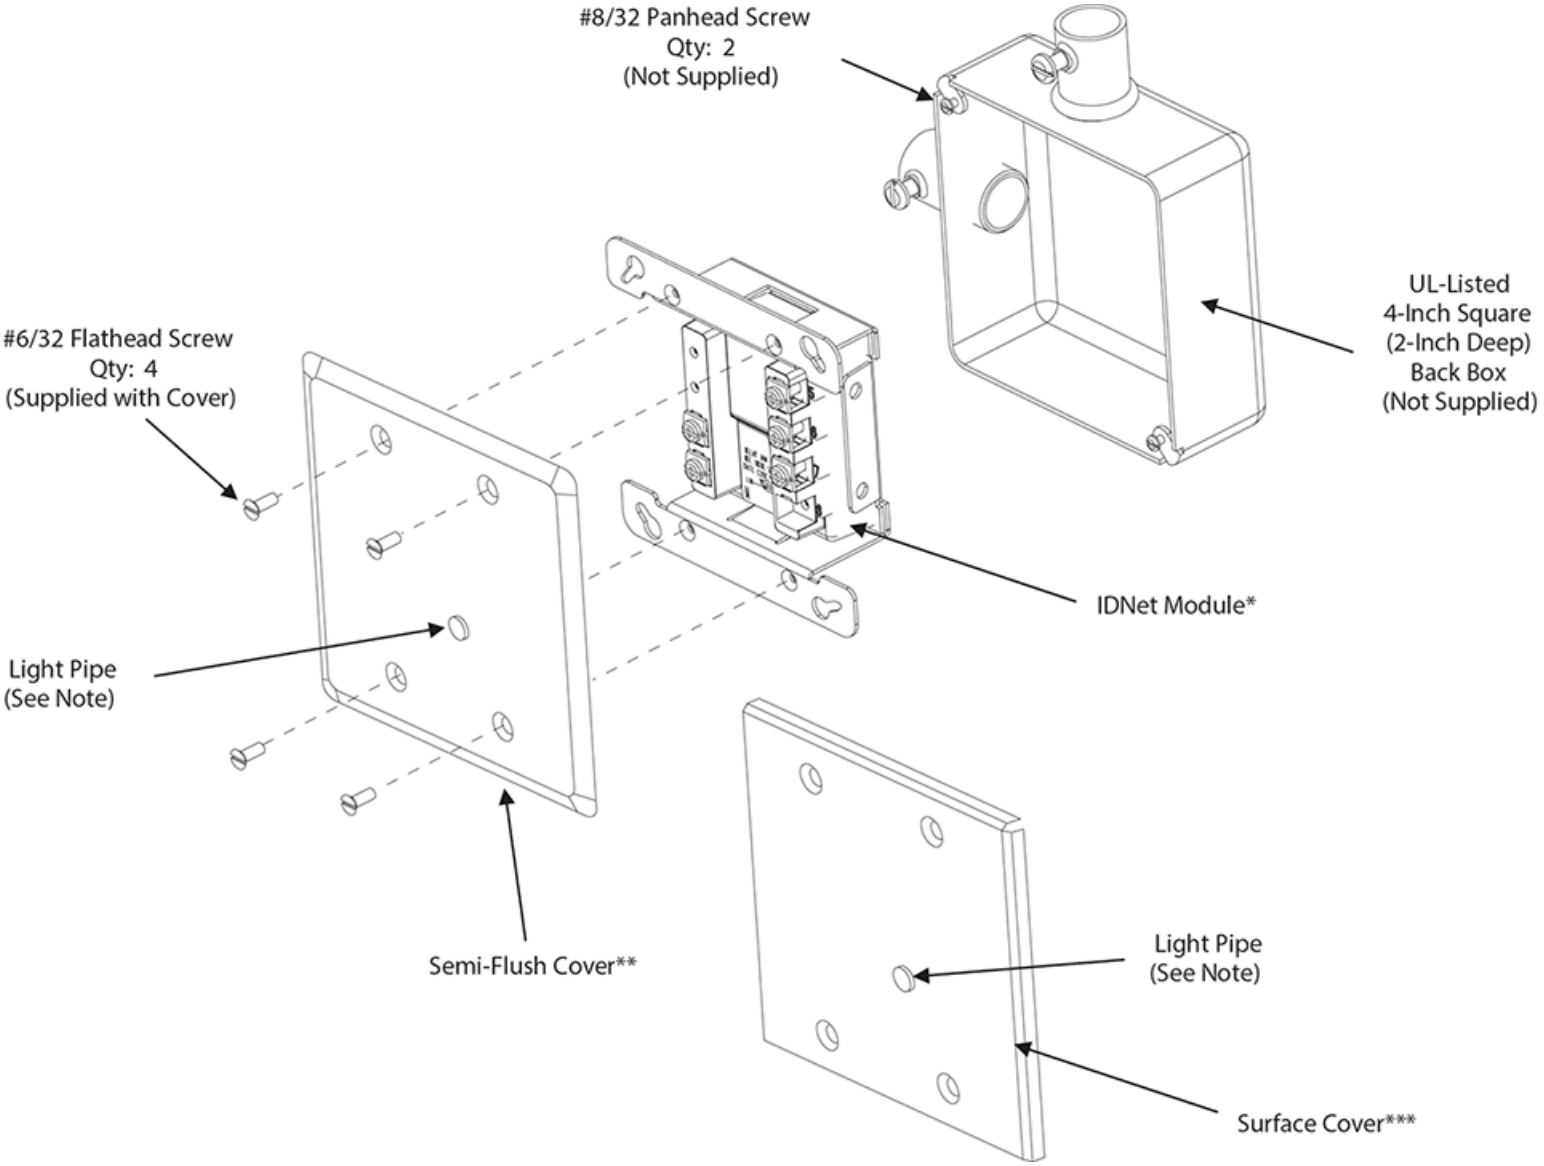


Figure 1: 4 inch square cover installation

* IDNet Module 4090-9002, 4090-9101, 4090-9106
** 4090-9801
*** 4090-9802

Note: Light pipe on cover must be in this orientation to view LED on module.

4090-9806 Semi-Flush Cover, 4090-9807 Surface Cover, and 4090-9810 Bracket Installation

IDNet™ modules that mount into a single-gang back box have Simplex semi-flush and surface cover options that allow viewing of the module LED.

Note: The 4090-9810 bracket assembly is required for the Simplex semi-flush and surface cover options. When not using Simplex semi-flush and surface cover(s) the bracket is an option when mounting the IDNet module.

Install the 4090-9806 Semi-Flush Cover, 4090-9807 Surface Cover, and 4090-9810 Bracket using Figure 2 as a reference. Mount the cover and module as follows:

The IDNet™ Module tabs snap into the bracket slots. Install the semi-flush or surface cover and bracket to the single-gang back box using the two #6/32 flathead screws.

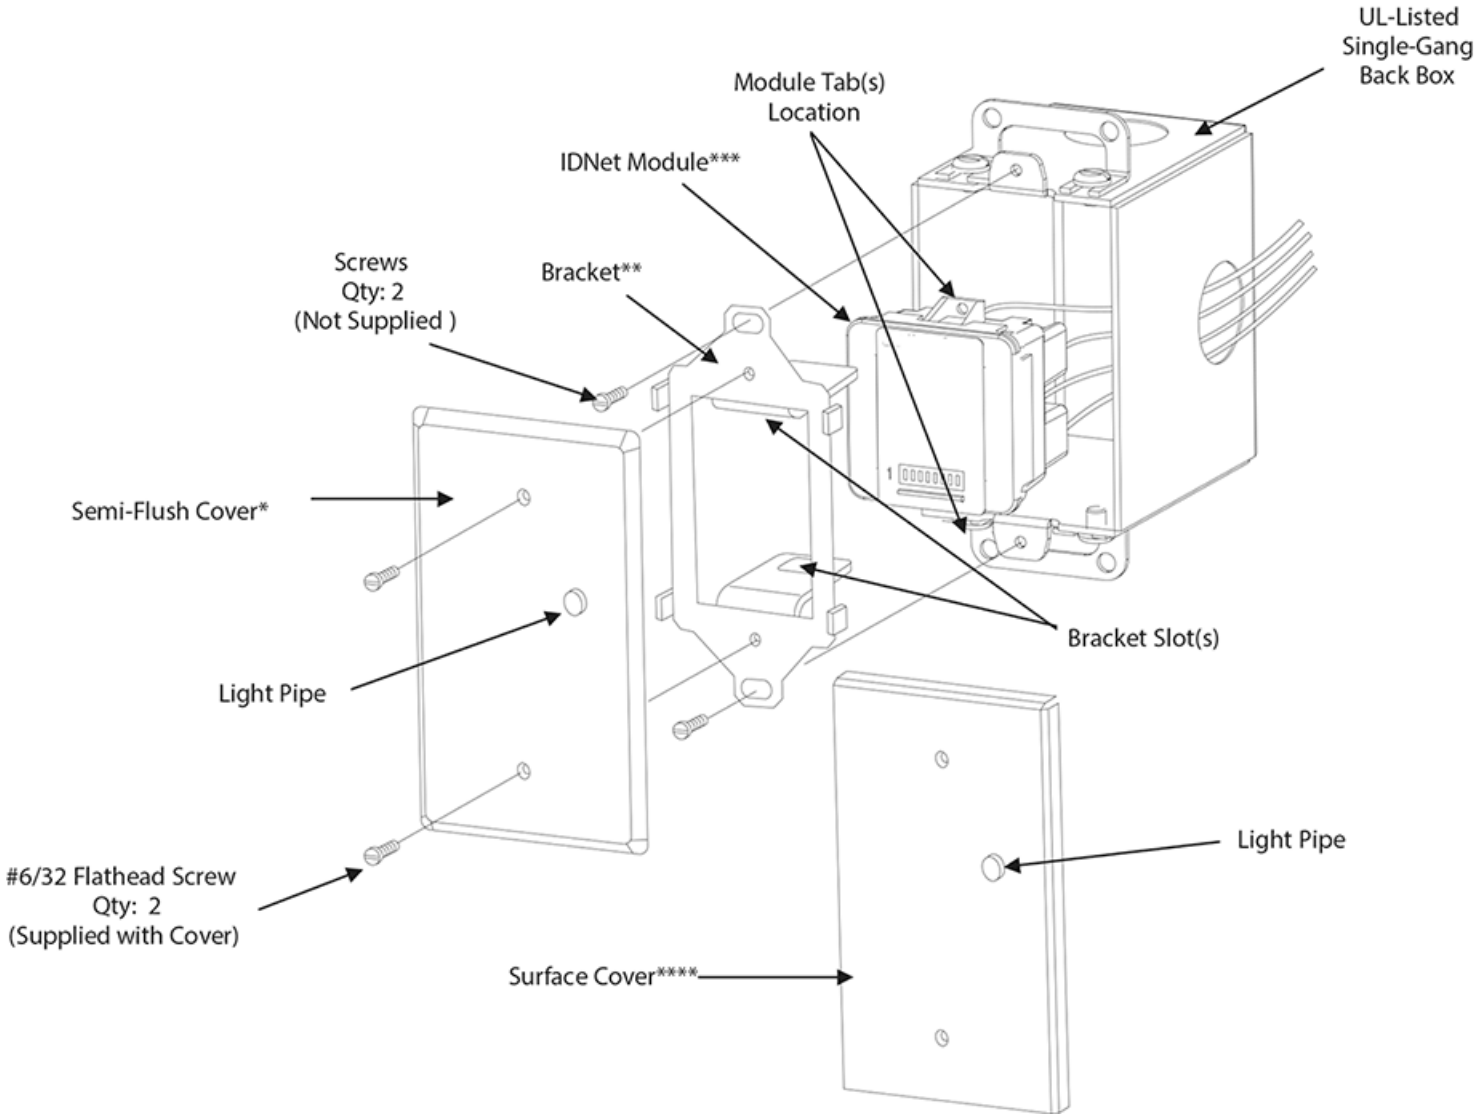


Figure 2: Single-Gang Cover Installation

* 4090-9806 Semi-Flush Cover
** Bracket 4090-9810
*** IDNet Module 4090-9001
**** 4090-9807 Surface Cover

Note: Light pipe on cover must be in this orientation to view LED on module.

© 2020 Johnson Controls. All rights reserved. All specifications and other information shown were current as of document revision and are subject to change without notice. Additional listings may be applicable, contact your local Simplex® product supplier for the latest status. Listings and approvals under Simplex Time Recorder Co. Simplex, and the product names listed in this material are marks and/or registered marks. Unauthorized use is strictly prohibited. NFPA 72 and National Fire Alarm Code are registered trademarks of the National Fire Protection Association (NFPA).