CDVI
Security to Access


Datasheet

ISO25 - ISO Printable CARD

Product Description

The ISO25 is a standard ISO Printable card. It contains a 125 kHz proximity technology RFID chip. This affordable RFID proximity solution is ideal for any standard access control projects.

CDVI offers a variety of access control credentials with different technologies (125 kHz proximity or MIFARE®). You'll find the ideal credentials to meet the needs of your installation. You can also customize our CDVI cards and tags with your own company logo (minimum order of 1,000 units).

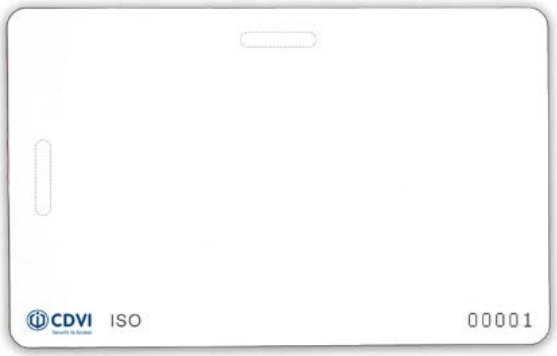

Key Features

- CDVI 26-bit encoding
- Sequential decimal number printed on each card
- Available in packs of 25

CE Certification

DEEE

RoHS Certification

All the information contained within this document (pictures, drawings, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. Published: 21 June 2023. CDVI_CS25_DS_01_EN_LETTER_C


CDVI Americas
828, St-Martin Blvd W
Laval, Quebec H7M 0A7

info@cdvi.ca
1-866-610-0102
www.cdvi.ca

5 YEAR WARRANTY

Product Specifications

Material:	PVC
Technology:	CDVI 26-bit encoding
Frequency:	125 kHz
Security level:	Standard
Weight:	0.2 oz, 8 g

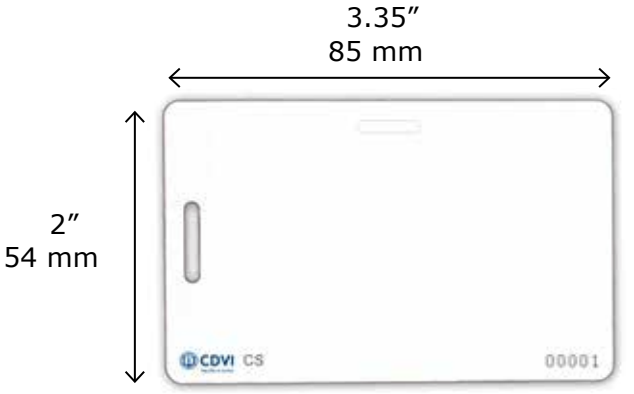

Thickness: 0.07”
(1.8 mm)

Also available in these technologies



ISOH25
HID-compatible 26-bit 125 kHz ISO Printable Card



ISOM
MIFARE® Classic 1K 13.56 MHz ISO Printable Card



ISODT
Dual-Tech CDVI 125 kHz & DESFire® EV2 ISO Printable Card

All the information contained within this document (pictures, drawings, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. Published: 21 June 2023. CDVI_CS25_DS_01_EN_LETTER_C

CDVI Americas
828, St-Martin Blvd W
Laval, Quebec H7M 0A7

info@cdvi.ca
1-866-610-0102
www.cdvi.ca

5 YEAR WARRANTY